

Industrial Paint Wall w/Filter Plenum IPW-FP/IPW-1000-FPEX

STANDARD FEATURES

- 35" deep x 14' wide x 9'1½" high - overall unit dimensions
- 30" UL approved Dayton fan with 3-phase, 2-hp motor with belts, pullies and sheave
- IPW-1000-FPEX removes overspray and contaminants
- IPW-FP ideal for use in prep areas – sanding/buffing
- 28 – 20" x 20" x 2" cabinet filters
- Draft gauge
- All 18 gauge galvanized steel construction panels
- Perfect for gel-coat application
- Use as welding station
- Easy to assemble
- UL approved components

OPTIONAL FEATURES

- **Single phase motor - available on IPW-FP only \$100
- 30" x 8' exhaust package 500
- 3-Sided Goff curtain system (24' x 24' x 12' x 10' high) with all hardware included for quick installation 1,375
- 2-Sided Goff curtain system (24' x 12' x 10' high) with all hardware included for quick installation 825

IPW-FP – For Prepping

List \$2,999

DIRECT DISCOUNT PRICE

\$2,499⁰⁰

Only

\$1,999⁹⁹

plus freight & crating

IPW-1000-FPEX – For Painting

List \$3,899


DIRECT DISCOUNT PRICE

\$2,999⁰⁰

Only

\$2,499⁹⁹

plus freight & crating

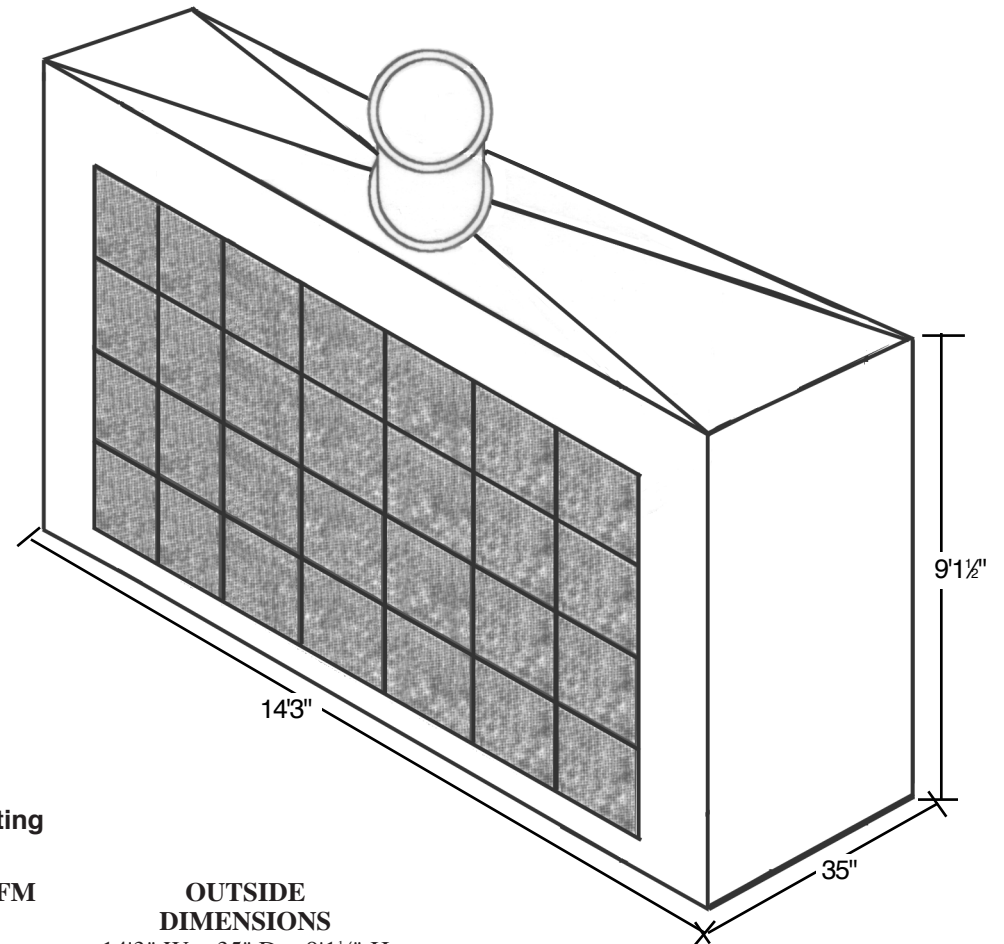

OUTSIDE DIMENSIONS
14'3" W x 35" D x 9'1½" H

| IPW-FP FAN MOTOR DATA | CFM | IPW-1000-FPEX FAN MOTOR DATA | CFM |
|--------------------------|--------|---|--------|
| QTY 1 | 12,000 | QTY 1 | |
| SIZE 30" | | SIZE 30" | |
| 3 PHASE 2-HP MOTOR | | 3 PHASE 3-HP | 13,000 |
| | | EXPLOSION-PROOF MOTOR (3 PHASE MOTOR ONLY) | |

****When ordering, please specify
single- or 3-phase motor; consult
an electrician if unsure**